


Windows 95/98 Dial-up Internet Connection


1. Open the **My Computer** icon on your desktop.




2. Click **Dial-up Networking**, and then select **Network and Dial-up Connections**.

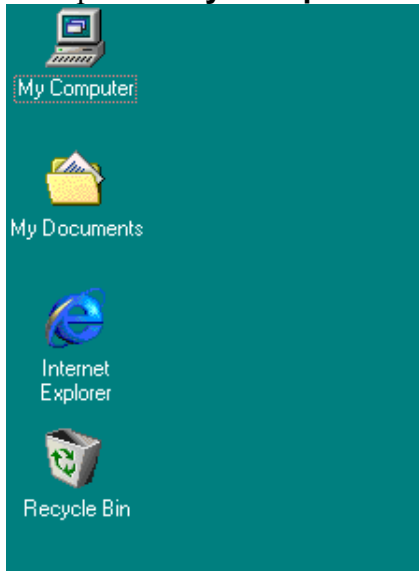


3. Type **FKBNet** in the first field. Select your modem from the list. Click **Next**.

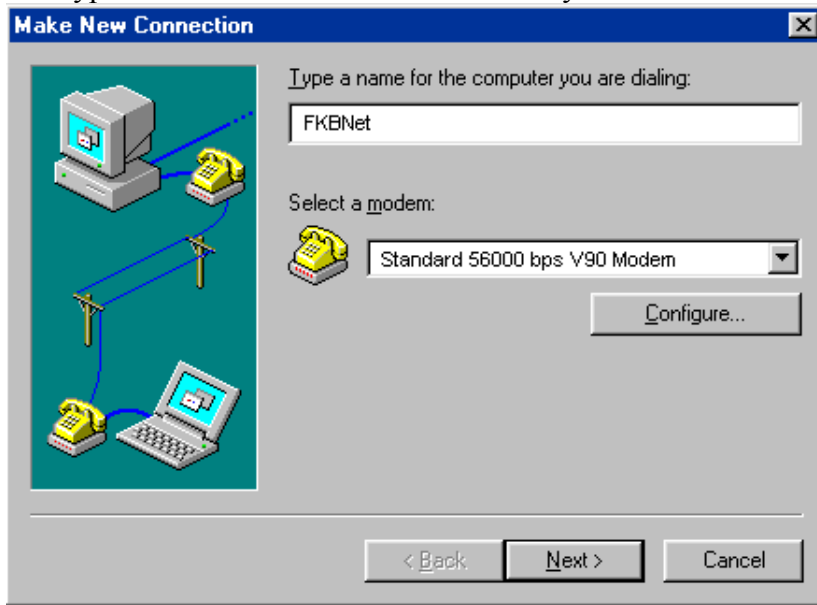


4. Enter your **Area code**, **Telephone number** and **Country code**. Click **Next**.

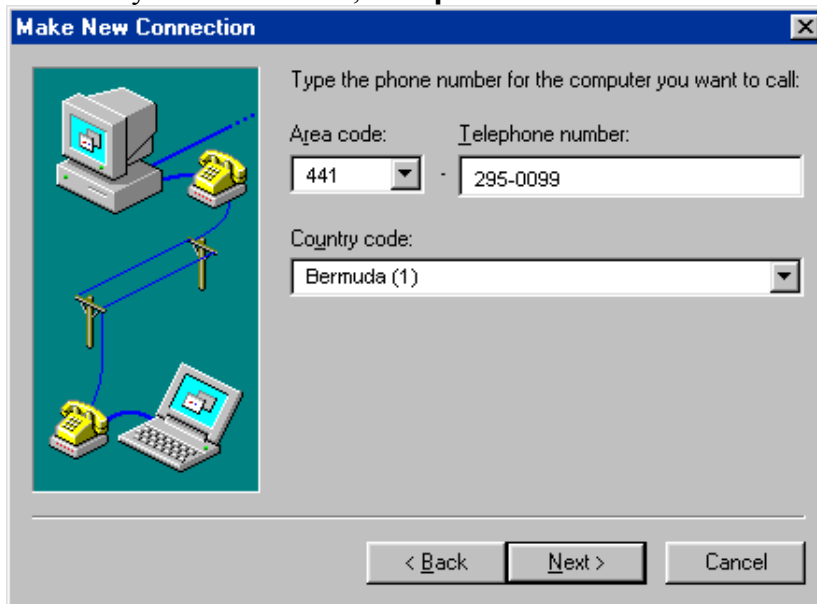


5. Click **Finish**.

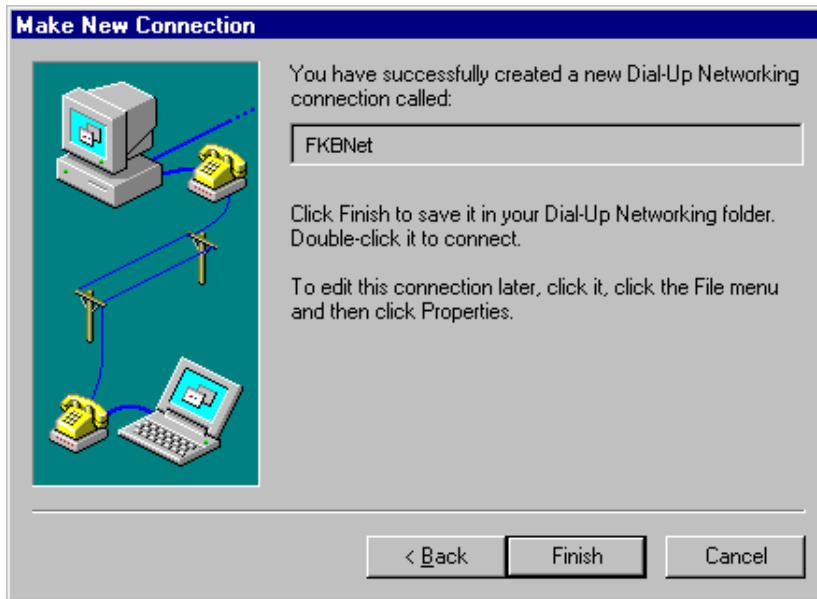


6. Right click on the new dial-up icon and choose **Properties**.

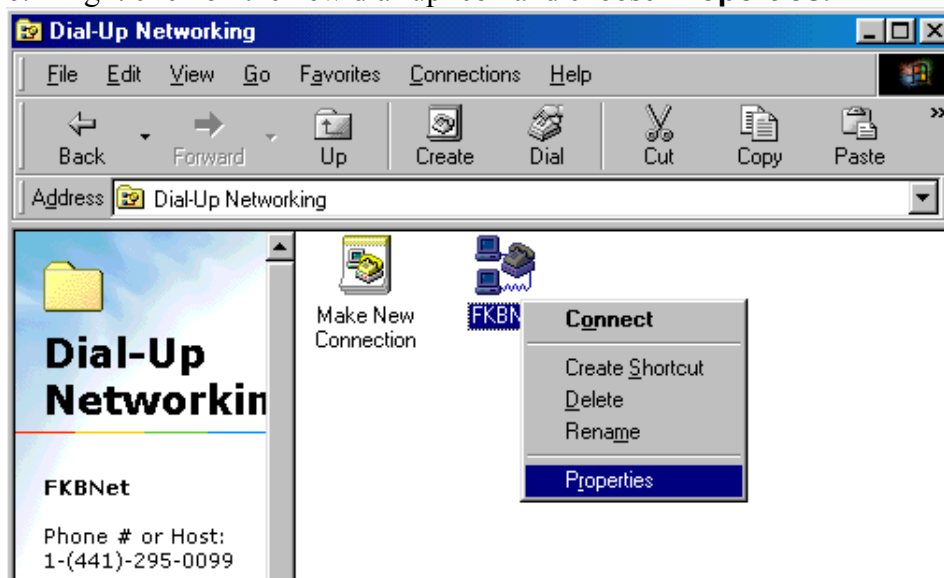

- Click the **Server** tab. **Select PPP: Internet, Windows NT server, Windows 98**. Under **Advanced Options**, uncheck all boxes except **Logon to Network**. Under **Allowed Network Protocols**, uncheck all boxes except **TCP/IP**. Click **TCP/IP Settings**.

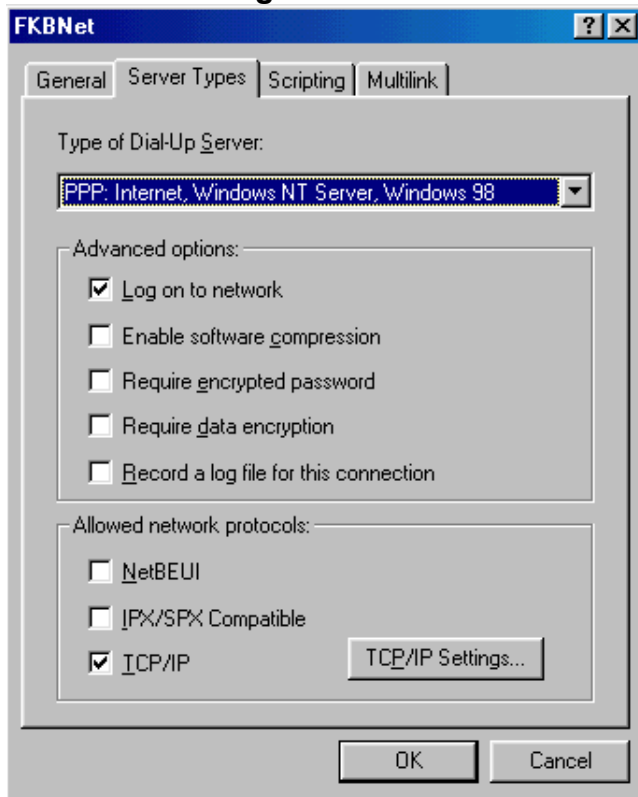

8. Click on the **Server Assigned IP Address** button. Click on the **Specify Name Server Address** button and fill in these values: **Primary DNS: 205.136.31.3**, **Secondary DNS: 205.136.31.20**. Make certain both boxes are checked at the bottom. Click **OK**. Click **OK** again.

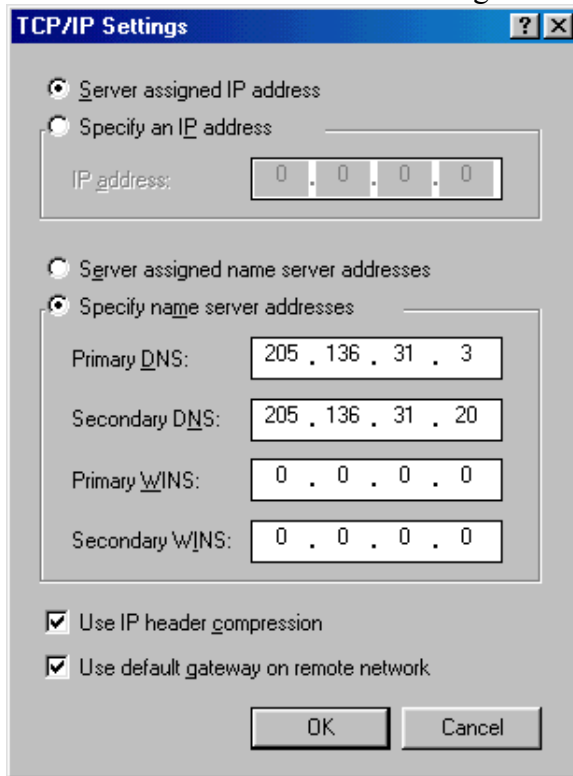

TCP/IP Settings

Server assigned IP address

Specify an IP address

IP address: 0 . 0 . 0 . 0

Server assigned name server addresses

Specify name server addresses

Primary DNS: 205 . 136 . 31 . 3

Secondary DNS: 205 . 136 . 31 . 20

Primary WINS: 0 . 0 . 0 . 0

Secondary WINS: 0 . 0 . 0 . 0


Use IP header compression

Use default gateway on remote network

OK Cancel

9. Click **OK**.

10. Double click on the **FKBNet** icon. Enter your **User name** and **Password**. Select **Save password**. If you do not, you will have to enter the password each time you connect. Click **Connect** to dial to the Internet.

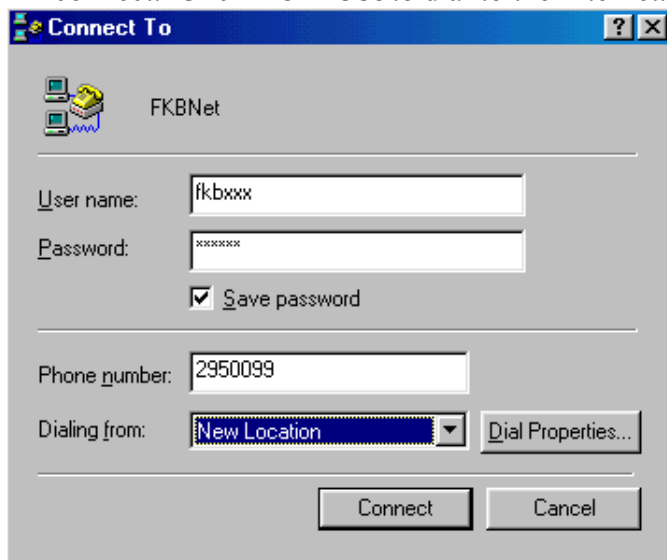

Connect To

FKBNet

User name: fkbxxx

Password: *****

Save password

Phone number: 2950099

Dialing from: New Location

Connect Cancel